

# FMTV A1 R M1078 A1


## 2.5 ton Standard Cargo

The Family of Medium Tactical Vehicles (FMTV) provides the U.S. Army's backbone for tactical unit mobility and logistics support throughout the battlefield. These vehicles are considered the most sophisticated off-road, multi-purpose military tactical vehicle in use, and are capable of operating worldwide on primary and secondary roads, as well as on trails and cross-country in weather extremes from -50°F (-46°C) to +120°F (49°C).

### Product Numbers

LIN T60081

NSN 2320-01-447-6343

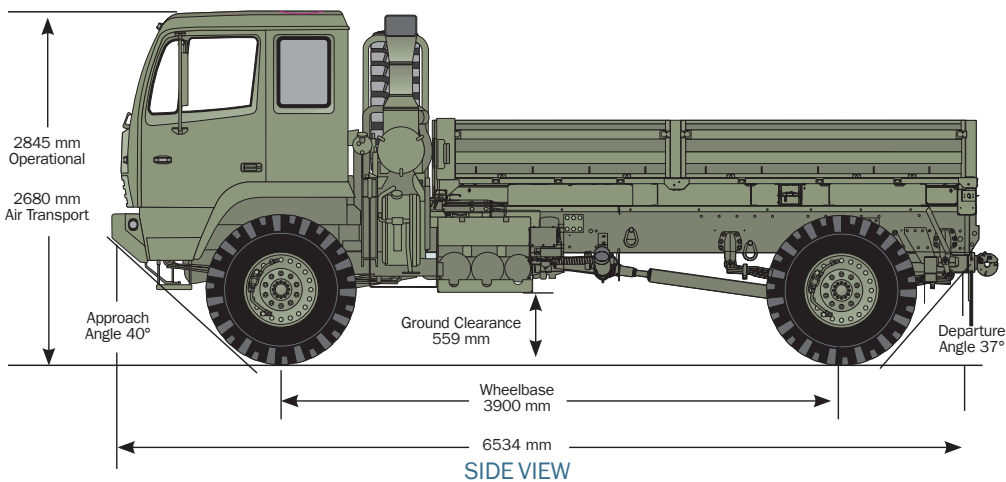

### KEY FEATURES

Full-time all-wheel drive

Fully automatic transmission

Electronic Central Tire Inflation System (CTIS)

Anti-lock Braking System (ABS)

Interactive Electronic Technical Manuals (IETM)

Fully MANPRINT compliant


C-130 air transportable at GVW

U.S. Army proven ultra-reliability

Family of 16+ vehicles with 80% commonality

U.S. Army certified 22-year corrosion protection

Highest proven reliability of any tactical vehicle

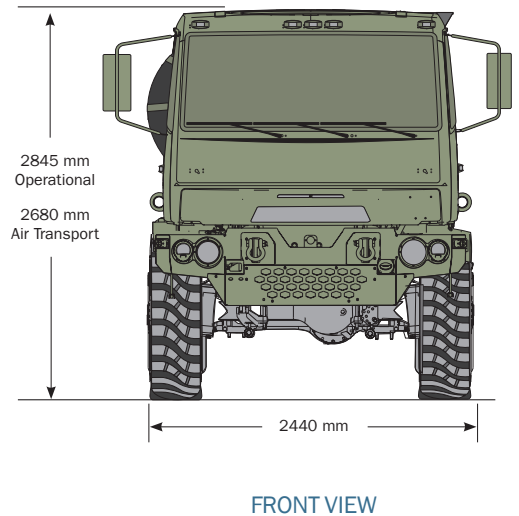

# FMTV A1 R M1078 A1

## 2.5 ton Standard Cargo

### VEHICLE SPECIFICATIONS

Length:	257.2 in (6,534 mm)
Width:	96 in (2,438 mm)
Height:	
Operational	112 in (2,845 mm)
For Air Transport	105.5 in (2,680 mm)
Height-Pintle:	
Unloaded	36 in (905 mm)
With Payload	33.5 in (851 mm)
Wheel Base:	153.5 in (3,900 mm)
Ground Clearance:	
Loaded	22 in (559 mm)
Under Axle	14.4 in (365 mm)
Approach/Departure Angle:	40°/37°
Vehicle Curb Weight with Fuel:	17,214 lb (7,808 kg)
Payload:	5,000 lb (2,268 kg) plus kits
Towed Load:	12,000 lb (5,443 kg)
Maximum Speed:	
Governed, at Gross Weight	58 mph (94 km/h)
Range, 58 gal (219 L) nominal:	400+ mi (645+ km)
Maximum Grade/Side Slope:	60%/30%
Turning Circle:	
Curb-to-Curb	61.7 ft (18.8 m)
Wall-to-Wall	65.7 ft (20 m)
Fording, without Kit:	30 in (762 mm)

### EQUIPMENT SPECIFICATIONS

Cab:	
Design	3-Man, Ergonomically Adjustable Driver Seat and Steering Wheel
Steering	Power Assisted, Recirculating Ball
Storage	8 cu ft
Suspension	3-Point Rubber Isolator
Engine:	
Caterpillar C7	Heavy Duty Diesel, 6-Cylinder, Electronic Controlled, Fuel-Injected Turbocharged and Aftercooled, EPA Certified
Rating	275 hp (205 kW) @ 2200 rpm
Displacement	441 cu in (7.2 L)
Torque	860 lb-ft (1,166 Nm) @ 1440 rpm
Fuel	Diesel, DF-2, JP-4, JP-8, VV-F-800
Oil	MIL-L-2104D, MIL-L-46167, 22 qt (21 L)
Transmission:	
Allison 3700SP	Automatic/Select 7-speed, Electronically Controlled
Full-Time All-Wheel Drive	Integral Transfer Case
Normal Operation	30% Torque Front Wheels, 70% Torque Rear Wheels; Off-Road, Equal Front and Rear
Oil	MIL-L-2104D, MIL-L-46167, 31.8 qt (30 L)
Axles:	
ArvinMeritor Carrier	Front and Rear Axles Single Reduction, Amboid-Gearing
Wheel End	Bevel Wheel End Reduction, Ratio 2:1
Overall Axle Gear Ratio	7.8:1
Front Axle Steering Angle	35°
Electrical:	
System	12/24 volt, EMI/HAEMP Qualified, Resettable Circuit Breakers, Central Power Distribution Panel, Battery and Charging Management System
Alternator	260 amp, 12/24 volt, Waterproof, EMI/RFI Suppressed
Starter	24 volt Waterproof
Instrumentation	SAE J1708 Data Bus Driven Instrument Cluster
Tires:	Michelin 395/85R20XML All-Terrain

Brakes:	
Primary	Dual-Circuit, Four Channel Air, Anti-Lock Braking System (ABS) with Trailers ABS Connectors for Emergency Towing
Supplemental	Air Actuated, Driver Controlled Exhaust Brake
Central Tire Inflation System, Eaton:	
	Cab-Mounted Electronic Controls, Operable While Driving Highway, Cross-Country, Air Transport, Sand/Mud/Snow, and Emergency Modes
Diagnostics, Interactive Electronic Technical Manuals (IETM):	
	Class V, Intrusive Diagnostics, SAE J1708/J1939 Data Buses to Diagnose All (4) Unique Electronic Control Modules (ECM)
Suspension:	
Front	Parabolic-Tapered Leaf Spring with Coil over Hydraulic Shock Absorbers
Rear	Parabolic-Tapered Leaf Spring with Hydraulic Shock Absorbers and Stabilizer Bar
Transportability/Deployability:	
Internally	Air-transportable by C-130, C-141, C-17, and C-5A at GVW
Externally	Transportable by CH-47 and CH-53 Helicopters
Self Recovery Winch:	
(Optional)	11,000 lb (4,990 kg) Rating, 280 ft (85.3 m) Line Capacity, Fore/Aft Recovery Positions
Cargo Bed:	
Inside Cargo Bed	149 in x 91 in (3,784 x 2,311 mm)
Ladder Construction	Integral, Stowed All Steel, E-COAT Rustproofing, Dropside with Side Rail Storage
Options	Troop Seats, Stowable Composite; Bows and Tarp Kit
Material Handling Equipment, Crane (Optional):	
	Loads/Unloads Cargo Bed and Trailer, Electric Operation, 1,500 lb (680 kg) Lift at 4 ft (1.2 m)

### FOR MORE INFORMATION CONTACT:

BAE Systems  
 5000 I-10 West  
 Sealy, TX 77474 USA  
 Telephone 281-856-0139  
 Toll Free 800-221-3688  
 Fax 713-867-1688  
 Email sales.mhv@baesystems.com  
 www.baesystems.com

This document gives only a general description of the product(s) or services and except where expressly provided otherwise shall not form part of any contract. From time to time, changes may be made in the products or the conditions of supply. BAE Systems reserves the right to change product specifications without prior notice.